
0912 / 0913 / 0914

Stainless Steel Bathroom Accessories











GENERAL DESCRIPTION

- + Bathroom accessories made with stainless steel 304 S.S 1.00 mm (0912) , 0.80 mm (0913-0914) thickness.
- + Available in only satine finish (0913-0914) and bright finish (0912).
- + Useful for the public areas.
- + 0912 is mounted with four steel 4 mm screws (provided in the box) with their 8 mm plastic plugs (also provided).
- + 0913 is mounted with two steel 4 mm screws (provided in the box) with their 8 mm plastic plugs (also provided).
- + 0914 can not be mounted.

0912

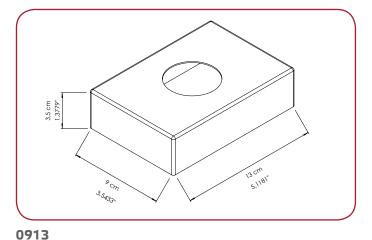




0914




COMPONENTS AND MATERIAL

- + 0912 Stainless Steel 304 bright finish
- + 0913 Stainless Steel 304 satine finish
- + 0914 Stainless Steel 304 satine finish



0912



0913

INSTALLATION

- + First measure out where the lid dispenser will be placed, mark four holes (0912), two holes (0913) and drill into the wall.
- + Insert the provided wall plugs and screw in the top two screws, leaving a slight gap for the dispenser to slot onto.
- **+** Open the dispenser lock before mounting the dispenser to the wall.
- **+** Slot the dispenser onto the two previously fixed screws and then screw final screws.
- + Once the dispenser is secure, you can close the lid.

MOUNTING TEMPLATE

Should be minimum 60 cm high from the floor.

DISPENSER REPLACEMENT REQUIREMENTS AND RECOMMENDATIONS

The following recommendations are intended to provide guidelines on the best possible placement of the dispensers. Because every location a dispenser is to be mounted is different, depending on customer site, physical size limitations, and avaliable space, these recommendations may not always be entirely possbile to follow. However, when placing a dispenser installation must meet ADA requirements and should promote ease of use and be in union with its surroundings. Upon installation, the dispenser should be level and the job results professional, presentable and fully functional.

AFTERCARE INSTRUCTIONS

- * Regular cleaning with a soft cloth will keep the surface of your product looking new. Soapy water can be used to remove stubborn marks . Dont use abrasive or chemical cleaners as these may damage the surface finish over time. Use chemicals suitable for plastic products.
- + Don't expose to sunlight.
- + Don't respond to the product with force against the possibility of damnification ,deformation.
- + Don't throw any cigarettes and flammable materials into the product.



0913

0914







CARTON
DIMEN.
29x29x43 cm
20x35x29 cm
29x43x29 cm



CARTON
WEIGHT
10,5 kg
10 kg
4 kg



INBOX PALL QUANTITY QUAN 12 540 40 2000 12 540



PALLET GF QUANTITY DII 540 80 2000 80



GROSS PALLET DIMEN. 80x120x220 cm 80x120x210 cm 80x120x225 cm



GROSS PALLET WEIGHT 488 kg 515 kg 195 kg

